

PACKO MAXX (ROUGH TOP CONVEYOR BELTS)

Product Feature:

The PACKO MAXX belt is specially designed for transporting light weight goods, either in inclined or in horizontal planes. These belts are designed to transport either fragile material or packed goods, such as, glass, papers, bags, boxes or cartons etc.

Benefits of PACKO MAXX:

The deep impression top cover on the PACKO MAXX belt provides thousands of flexible gripping; these gripping generate the relief effect, absorbing any vibrations and impacts exerted on the materials and simultaneously prevents the material from slipping on high inclined conveyors. Oriental PACKO MAXX belts are light in weight, move on either slider bed or on idler rollers. For slider beds, we manufacture these belts with our special bare back fabric construction. Special care is taken to ensure that there is no "strike through" of rubber on the bare side.

Product Application:


- Packing industry, bagging plants
- Food packaging industry
- Fragile goods manufacturing / packing

PACKO MAXX belts are not suitable for conveying goods where the angle of incline is more than 35 degrees. Also conveying of sticky material and powder is not recommended.



Product Characteristics:

Width	: Upto 1500 mm
Ply	: 2 plies to 3 plies
Belt Length Range	: Standard Length of 100 m
Carcass Variety Available	: EP / NN
Carcass Strength Rating	: 200 - 500
Rubber Cover Grades	: M / N / DIN Y
Rubber Covers Thickness	: min. 3.0 mm top cover, 1.5 mm bottom cover
Rubber	: Black
Surface Finish	: Top rough Top and Bottom with cover or Bare back
Edge	: Cut Edge only
Splicing Method	: Hot splice / Cold splice / Lacing
Packing Available	: Single Roll

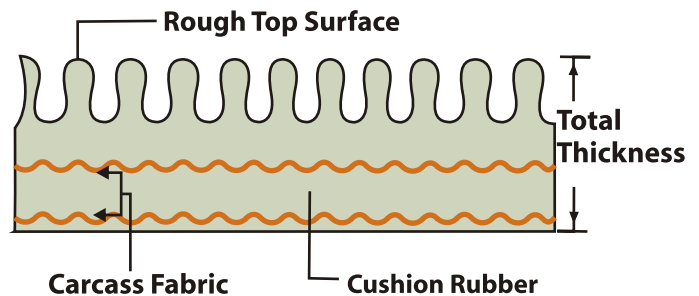

PACKO MAXX
Rough Top